

Copper Structured Cabling, Patch cord, CAT6A, U/UTP

Features and benefits

- Molded strain relief snag-less boot
- 8-pin high quality RJ45 plugs with 50-micron gold plated contacts
- Cable constructed from stranded wire for flexibility and minimum crosstalk
- Compliant to ISO/IEC 11801 Ed 2.2, ANSI/TIA-568-C.2, EN 50173-1
- IEC 61156-6, EN 50288-10-2
- IEC 60332-1-2, IEC 60754-2, IEC 61034
- Reliable performance
- Super-standard performance margin



Description

Opterna UTP Patch cords conform to ANSI/TIA/EIA-568-C.2, ISO/IEC 11801:2011 edition 2.2 and CENELEC EN 50173 (2011) for Category 6A/Class EA applications.

The products have been tested up to 500 MHz and are designed for high speed protocols such as 10 Gigabit Ethernet (10G) applications.

The patch cords are constructed of a SF/UTP stranded wire cable and comprises two modular plugs at both ends of the cables. The SF/UTP cable eliminate alien-crosstalk near the panel end. The RJ45 plugs are protected with molded snag-less boots that prevents the latch on the RJ45 plugs from getting damaged during installation.

Applications

- Cross connect, Patch Panel and Work Area
- 4/16 Mbps Token Ring (IEEE 802.5)
- 10/100/1000 BASE-T, 10G (IEEE 802.3)
- 155 Mbps ATM
- 100 Mbps TP-PMD
- Analogue Voice, ISDN, ADSL

Standards

- ANSI/TIA-568-C.2
- ISO/IEC 11801:2011 (Ed 2.2) Class EA
- CENELEC EN 50173-1:2011
- ANSI/TIA-1096-A (formerly FCC Part 68)
- IEC 60603-7-41

Technical data


Mechanical data	Value
Dimensions (W x D x H)	See technical drawing
Cable construction	Category 6A S/FTP

Number of pairs	4
Colors of twisted pairs	Blue-white/blue, Orange-white/orange, Green-white/green, Brown-white/brown
Material	Conductor material - Stranded copper conductor Conductor insulation - HDPE Contact - Phosphor Bronze contact area is plated with 50micro-inches of Gold Over 100 micro-inches of Nickel Molded boot - Fire retardant PVC/LSZH compounds Cable jacket - PVC/LSZH Cable Diameter - <6.35mm
Conductor diameter	26 AWG, 7 stranded copper wire conductors
Plugs	RJ45 8P8C 94V0 Flame retardant PC
Fire resistance	CMG
Total contact force	800 grams
Retention	50N
Insertion/extraction	750 cycles minimum
Insulation resistance	500MΩmin. @ 100V d.c
Dielectric withstanding voltage	1000V d.c
Contact resistance	20mΩ Max.

Environmental data

Temperature range	Value
Operation	-10° C to +60° C
Storage	- 40° C to +70° C
Relative humidity (operational)	Maximum non-condensing 93%

Technical drawing

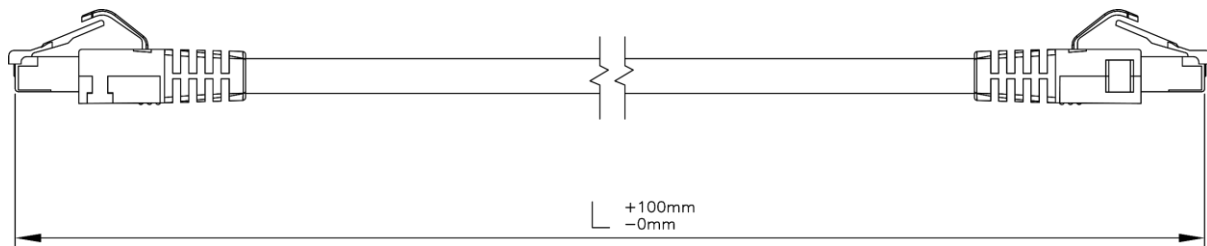

Ordering information

Description	Part code
Patch cord UTP, category 6A, standard plug, PVC	SCS-PC-C6A-UTP-yyM-PVC-xx
Patch cord UTP, category 6A, standard plug, LSZH	SCS-PC-C6A-UTP-yyM-LSZH-xx

yy – length:0.5m,1m,1.5m,2m,3m,5m,10m

xx – color: Black (BK), Blue (BL), Green (GN), Gray (GY), Orange (OR), Red (RD), White (WH), Yellow (YL)