

Fiber Optic, Patch Panel, Fixed (unloaded)

Features and benefits

- Fast and easy access to front and rear connectors
- Can be installed within the standard 19" racks and wall mounted enclosures according to IEC 297-3 specification.
- Rear of panel offers a range of apertures to accommodate a variety of gland configurations.
- Minimum depth 235mm and the base panel is designed for customized fiber management with additional anchoring points for incoming cables.
- Front face of the panel includes a port identification strip.
- Fiber management kits and Splice cassette are offered as accessories



Description

Opterna Fiber Optic 19" Unloaded Fixed Patch Panel has been designed to facilitate internal fiber management and also to maximize fiber density in 1U, 2U heights.


The Fixed panel gives an economical option to the buyer. Constructed from mild steel with a powder coated finish the panel is available in Black or Grey colors.

The panel supports 24 way and 48 way configurations in SC simplex, SC Duplex, ST/FC (D cut out), LC Duplex (SC simplex foot print), LC Quad (SC Duplex foot print).

Technical data

Mechanical data	Value
Dimensions (W x D x H)	See technical drawing
Material	Steel powder-coated
Height variants	1U,2U and 4U

Technical drawing

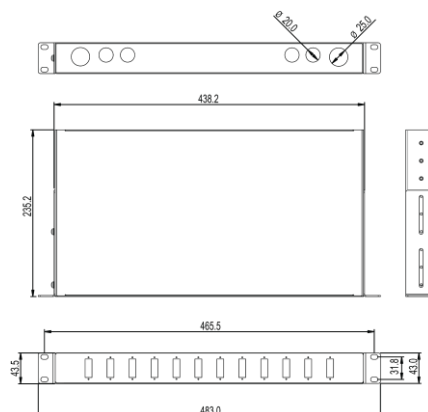

Ordering information

FPFX- 1 2 3 4

1. Select cut-out type
 SCSX = SC simplex
 SCDX = SC duplex
 DCSX = ST/FC 'D' cut-out

2. Number of fibers per panel
 012 = 12 fibers
 024 = 24 fibers
 048 = 48 fibers

3. Select panel height in 'U'
 1 = 1U
 2 = 2U
 4 = 4U

4. Select panel colour
 G = Gray powder coated
 B = Black powder coated

Accessories	Part code
Universal splice cassette for two splice holders, unloaded	OPFC-STGR24
Cover for splice cassette	OPFC-STGR24-L
Holder for 12 ANT sandwich splice protectors	OPFC-STGR24-CH
Holder for 6 heat shrink splice protectors	OPFC-STGR24-SH
Stacking hinge for OPFC-STGR24	OPFC-STGR24-CH
12-way stackable splice cassette with splice holder and cover (180mm x 108mm x 13mm)	SPTR-1224-BK
24-way stackable splice cassette with splice holder and cover (225mm x 108mm x 13mm)	SPTR-1224-WH
24-way stackable splice cassette with splice holder and cover (160mm x 105mm x 10mm)	SPTR-1224-BL
24-way splice bridge with adhesive strip and cover	FP-AC-SB-24
PG13.5 (5-9mm) cable gland and nut, black nylon material	FP-AC-CG-13B
PG16 (10-14mm) cable gland and nut, black nylon material	FP-AC-CG-16B
Bunny clip	FP-AC-BC
Fiber management kit consisting of 1 x FP-AC-CG-13B and 8 x FP-AC-BC	FP-AC-FMK
SC simplex blanking plug	FP-AC-BLNK-SCSX
SC duplex blanking plug	FP-AC-BLNK-SCDX
ST/FC simplex blanking plug	FP-AC-BLNK-DCSX
60mm x 3mm heat shrink splice sleeve	PSCL-600-15-30
60mm x 2.5mm heat shrink splice sleeve	PSCL-600-15-25